



DATASHEET

INFRALAN® U-DQ(ZN)BH OM4 24G (1x24) Dca 1750N
LSZH black 7.5mm

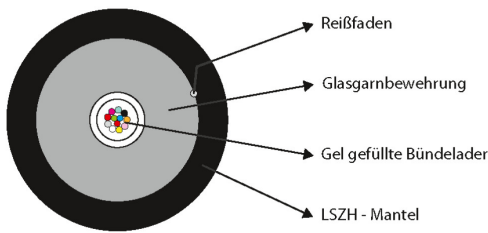

General data

Application:

For fixed installation indoor and outdoor
In cable ducts, tubes and interconnections
Mechanical installation by winch is permitted only when using force meters with recording function
Not suitable for underground laying (direct buried)

Characteristics:

Universale cable
Suitable for connector assembly

The cable diameter can vary

Allgemeine Daten

UV resistance	True
Longitudinal water blocking	True
Application	Inside/outside
With strain relief	True
Radial water blocking	False

General data

This datasheet was created automatically on 30-01-2025 . Technical changes reserved.



EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION



DATASHEET

INFRALAN® U-DQ(ZN)BH OM4 24G (1x24) Dca 1750N LSZH black 7.5mm

Cable metal free	True
Colour outer sheath	black
Halogen free	acc. EN 60754-1/2
Armouring	True
Blow in	False
Circuit integrity	False

Mechanical characteristics

Crush resistance	1500 N/dm
------------------	-----------

Mechanische Eigenschaften

Longitudinally watertight	3/24 m/h
---------------------------	----------

Kabelaufbau

Fiber Colours	orange
Fibre type	Multi mode 50/125
Tube Ø	Up to 12 fibers: 3.5
Fiber marking	Colour
Tube marking	Colour
Type of tube	Central tube
Fibre category	OM4

Cable sheath

Euro Class	Dca
Oil resistant	No
Flame retardant	According to EN 60332-1-2
Jacket Material	LSZH
Low smoke	acc. EN 61034-2

Kabelmantel

Resistant to chemicals	False
------------------------	-------

Umgebungsbedingungen

Temperature Range (Installation)	-5 - 50 °C
Temperature Range (Storage)	-25 - 70 °C

This datasheet was created automatically on 30-01-2025 . Technical changes reserved.



DATASHEET

INFRALAN® U-DQ(ZN)BH OM4 24G (1x24) Dca 1750N LSZH black 7.5mm

Temperature Range (Operation)	-20 – 60 °C
-------------------------------	-------------

Transmission characteristics

Rayleigh Backscatter Coefficient 1300nm	1.478
Rayleigh Backscatter Coefficient 850nm	1.483

Übertragungstechnische Eigenschaften

IL max. (dB/km) 1300nm	0.7
IL max. (dB/km) 850nm	2.5

Normen, Zulassungen, Zertifizierungen

Fire load	-
Transmission standards	IEEE 802.3 10Mbit to 100Gbit
With rodent protection	True

Standards, approvals, certifications

Low smoke (according to EN 61034-2)	True
Harmonised Standard	EN 50575
Halogen free (according to EN 60754-1/2)	True
Oil resistant (acc. EN 60811-2-1)	False

Available variants

ArtNr.	Bezeichnung	Construct	Brandlast	Biegeradius	VDE-Bezeichnung	Kabel Ø	Zugkraft Verlegung	Gewicht
54504.2L-CPR	INFRALAN® U-DQ(ZN)BH OM4 4G (1x4) Dca 1750N LSZH black 7.0mm	4G (1 x 4) Multimode OM4	0,71 MJ/m	140 mm	U-DQ(ZN)BH 4G50/125	7,0 mm	1750 N	55 kg/km
54508.2L-CPR	INFRALAN® U-DQ(ZN)BH OM4 8G (1x8) Dca 1750N LSZH black 7.0mm	8G (1 x 8) Multimode OM4	0,71 MJ/m	140 mm	U-DQ(ZN)BH 8G50/125	7,0 mm	1750 N	55 kg/km

This datasheet was created automatically on 30-01-2025 . Technical changes reserved.

DATASHEET

**INFRALAN® U-DQ(ZN)BH OM4 24G (1x24) Dca 1750N
LSZH black 7.5mm**

54512.2L-CPR	INFRALAN® U-DQ(ZN)BH OM4 12G (1x12) Dca 1750N LSZH black 7.0mm	12G (1 x 12) Multimode OM4	0,71 MJ/m	140 mm	U-DQ(ZN)BH 12G50/125	7,0 mm	1750 N	55 kg/km
54524.2L-CPR	INFRALAN® U-DQ(ZN)BH OM4 24G (1x24) Dca 1750N LSZH black 7.5mm	24G (1 x 24) Multimode OM4	-	150 mm	U-DQ(ZN)BH 24G50/125	7,5 mm	1750 N	55 kg/km

This datasheet was created automatically on 30-01-2025 . Technical changes reserved.

